

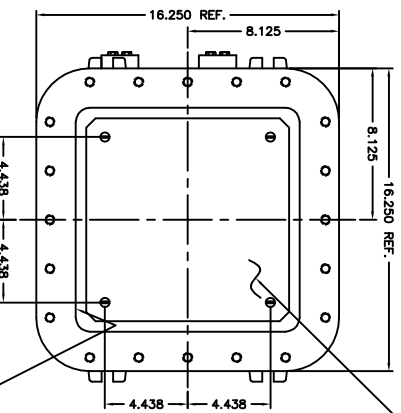


OPTIONAL XHC-2 HINGES

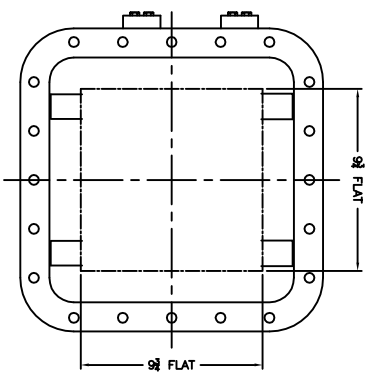


OPTIONAL MTC. PAN

EXISTING GRD. SCREW



XCEX 1212 COVER

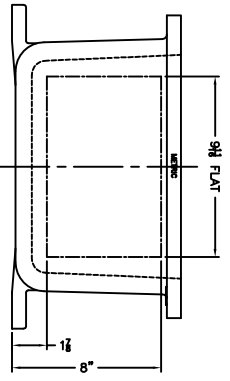

- NOTES:
- COVER DRILLING ALLOWABLE IN XCE ONLY.
  - MINIMUM SPACING FROM CENTER OF OPERATOR TO NEAREST FLAT IS 1 1/2.
  - MINIMUM SPACING BETWEEN FLATS IS 1/2 SM OPERATOR CENTERS IS 3 FOR THIS ENCLOSURE.
  - DIMENSION FROM CENTER LINE OF COVER FOR OPERATORS.
  - DIMENSION FROM CENTER LINE AND BACK OF MTC. LUG FOR CONDUIT.
  - FOR MTC. ENCLOSURE USE 1 BOLT.

		MODIFIED XCEX 121208 ENCLOSURE FOR	
TUMBLAST XCEX 121208		11-12-01 1-3.5 D 10F1	