
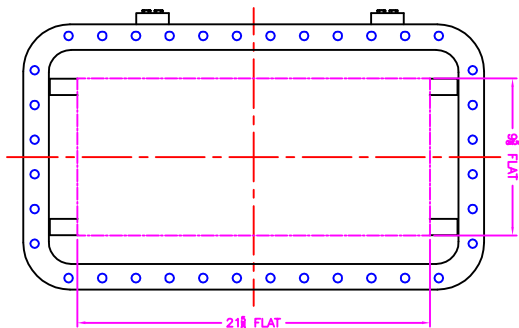



OPTIONAL MTG. PAN

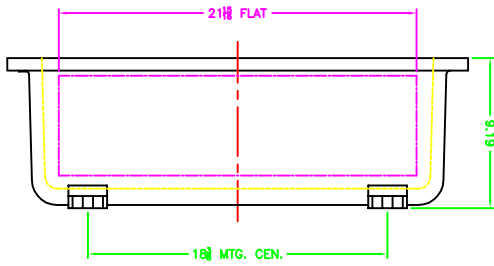

XCE 1224 COVER

- NOTES:
- COVER DRILLING T, MINIMUM SPACING FROM CENTER OF OPERATOR TO NEAREST FLAT IS 1 1/4"
 - ALLOWABLE IN XCE ONLY.
 - MINIMUM SPACING BETWEEN #14 NPSM OPERATOR CENTERS IS 3 FOR THIS ENCLOSURE.
 - MAXIMUM NUMBER OF OPERATORS IS 21.
 - DIMENSION FROM CENTER LINES OF COVER FOR OPERATORS.
 - DIMENSION FROM CENTER LINE AND BACK OF MFG. LOG FOR CONDUIT.
 - FOR MTG. ENCLOSURE USE #1 BOLT.

		MODIFIED XCE/Y/F 122408 ENCLOSURE FOR	
DATE: 11-12-01 BY: DDH	DATE: 1-4 BY: D	TUMBLAST XCE/Y/F 122408	10F1