

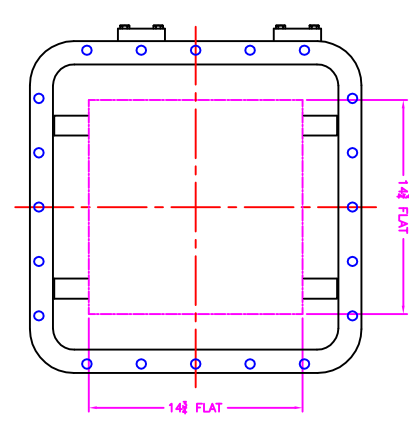


OPTIONAL MTG. PAN

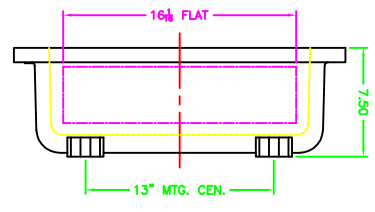

XCE 1818 COVER

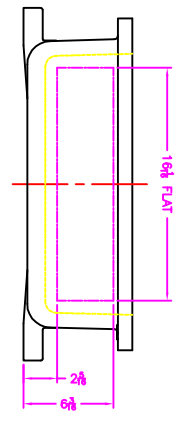

- NOTES:
- COVER DRILLING T₁ MINIMUM SPACING FROM CENTER OF OPERATOR TO NEAREST FLAT IS 1 1/8".
 - ALLOWABLE IN XCE ONLY.
 - MINIMUM SPACING BETWEEN 1-14 NPSM OPERATOR CENTERS IS 3/4" FOR THIS ENCLOSURE.
 - MAXIMUM NUMBER OF OPERATORS IS 16.
 - DIMENSION FROM CENTER LINES OF COVER FOR OPERATORS.
 - DIMENSION FROM CENTER LINE AND BACK OF MTG. LUG FOR CONDUIT.
 - FOR MTG. ENCLOSURE USE 1/2" BOLT.

		MODIFIED XCE/XUF 181806 ENCLOSURE FOR	
DATE: 11-15-01 DRAWN BY: DDH CHECKED BY: 1-4-5 TOLERANCE: 10F1	TUMBLAST XCE/XUF 181806	DATE: 11-15-01 DRAWN BY: DDH CHECKED BY: 1-4-5 TOLERANCE: 10F1	DATE: 11-15-01 DRAWN BY: DDH CHECKED BY: 1-4-5 TOLERANCE: 10F1