
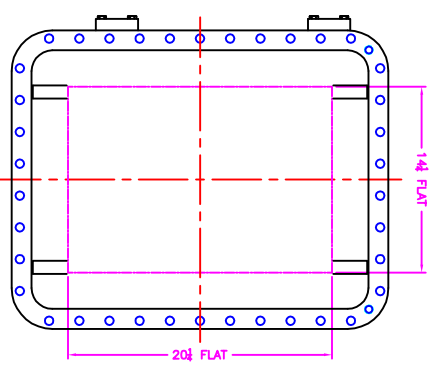
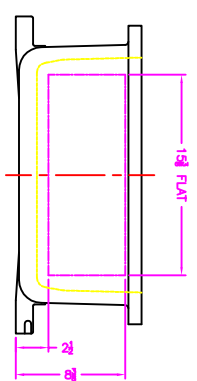


OPTIONAL MTG. PAN

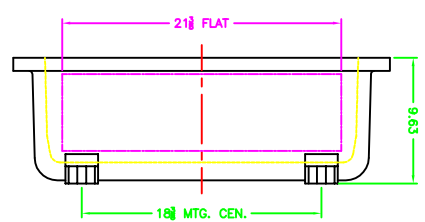

XCE 1824 COVER

- NOTES:
- COVER DRILLING T: MINIMUM SPACING FROM CENTER OF OPERATOR TO NEAREST FLAT IS 1 1/8.
 - ALLOWABLE IN XCE ONLY.
 - MINIMUM SPACING BETWEEN 1-14 NPSM OPERATOR CENTERS IS 2 1/2 FOR THIS ENCLOSURE.
 - MAXIMUM NUMBER OF OPERATORS IS 24.
 - DIMENSION FROM CENTER LINES OF COVER FOR OPERATORS.
 - DIMENSION FROM CENTER LINE AND BACK OF MTG. LUG FOR CONDUIT.
 - FOR MTG. ENCLOSURE USE 1/2 BOLT.

		MODIFIED XCE/XUF 182408 ENCLOSURE FOR	
DATE: 11-16-01 DESIGNED BY: DDH DRAWN BY: TUMBALST CHECKED BY: D APPROVED BY:	XCE/XUF 182408 TUMBALST XCE/XUF 182408	11-16-01 1-5 D 10F1	10F1