

# NEMA TYPE 4X

## WMDD Series

# Wall Mounted Double Door Enclosures

These double door enclosures are used indoors and outdoors to house such items as electronic / electrical controls, instrumentation systems, and pneumatic, hydraulic, and machine tool controls. These enclosures are designed to provide protection against dust, dirt, oil and water. They are suitable for use in petrochemical plants, dairies, breweries, food processing areas and similar environments where they are subject to frequent high pressure hosing and generally wet conditions. The Type 4X rating and stainless steel construction also allows for installation in areas where severe corrosion problems may exist.

### STANDARD FEATURES

- Continuous hinge (removable hinge pin)
- Wall mounting feet
- Watertight urethane gasket
- Lockable 3 point latch handle
- Heavy duty Type 316 lifting bolts
- Removable center post for panel installation
- Print pocket
- 3/8" Collar studs for optional mounting panel (mounting panels sold separately)
- Grounding studs on inside of box and cover

### DESIGN OPTIONS

- Painted steel and stainless steel mounting panels
- Laser cut entries or cut-outs
- Terminal blocks or other component assembly
- Print pockets
- Swing panel / dead front panel
- Louvers, fans and filters
- Quick release latches
- Epoxy paint or powder coating
- Custom sizes
- 12 gauge material thickness
- Drip shields and sun shields
- Window kits

### MATERIAL

- 14 and 16 gauge / Type 304 or 316L stainless steel
- Stainless steel hardware
- #3 / #4 brushed finish

### CERTIFICATIONS

NEMA Type 3, 3R, 4, 4X, 12 & 13  
UL50  
cULus Listed





### N4X-WMDD

Catalog Number*	A	B	C	M	N
N4X-244208WMDD	24.00	42.00	8.00	21.25	39.25
N4X-244808WMDD	24.00	48.00	8.00	21.25	45.25
N4X-304210WMDD	30.00	42.00	10.00	27.25	39.25
N4X-304810WMDD	30.00	48.00	10.00	27.25	45.25
N4X-306010WMDD	30.00	60.00	10.00	27.25	57.25
N4X-364212WMDD	36.00	42.00	12.00	33.25	39.25
N4X-364812WMDD	36.00	48.00	12.00	33.25	45.25
N4X-366012WMDD	36.00	60.00	12.00	33.25	57.25
N4X-424212WMDD	42.00	42.00	12.00	39.25	39.25
N4X-424812WMDD	42.00	48.00	12.00	39.25	45.25
N4X-426012WMDD	42.00	60.00	12.00	39.25	57.25
N4X-484812WMDD	48.00	48.00	12.00	45.25	45.25

\*NOTE: for Type 316L Stainless Steel, substitute catalog prefix N4X with N4X6.

## TOP VIEW

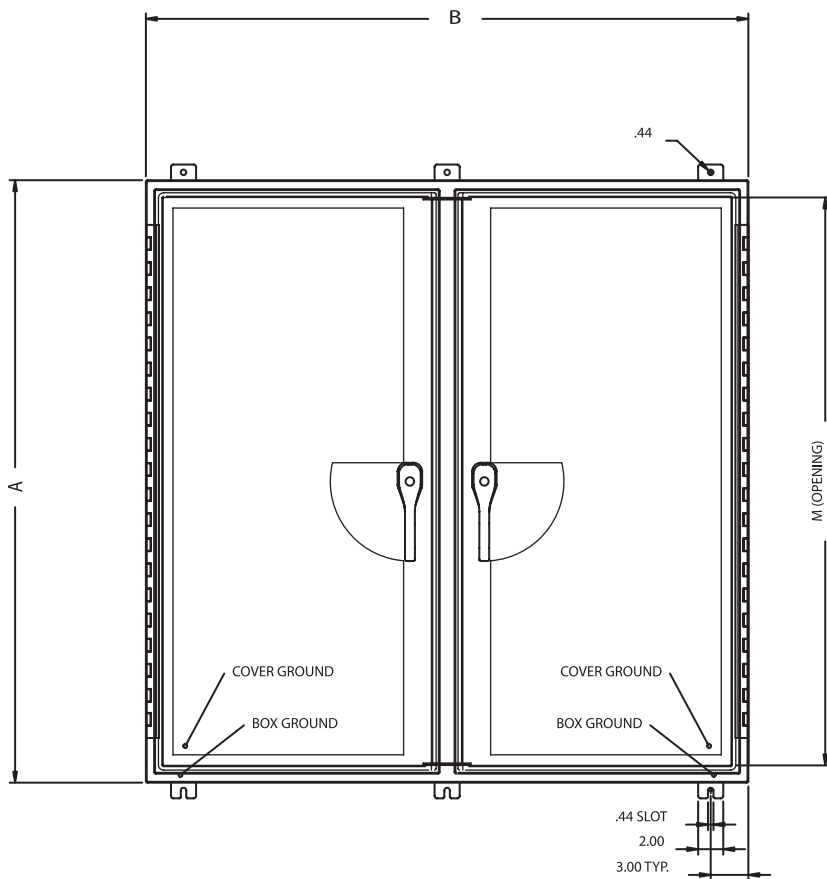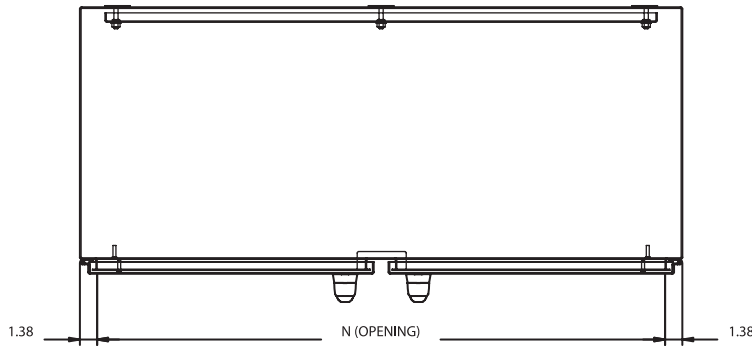

## SIDE VIEW

