

PUSHBUTTONS

XHP: Explosionproof/Flameproof Pushbuttons

FEATURES


- Durable die-cast aluminum barrels
- Exposed aluminum components are anodized for superior corrosion and UV resistance
- Heavy-duty nylon buttons
- Long-lasting anodized aluminum heads (mushroom heads only)
- Designed for installation into ¾" NPSM entries

DESIGN OPTIONS

- Short and long-barrel (for enclosure covers thicker than ¾")
- Variety of colors to choose from
- Pad-lock provision (sold separately)
- Guards available
- Various contact block configurations (sold separately)
- Installed in Adalet enclosures with no installation charge
- Mushroom head buttons available as momentary or maintained
- Protective boots available for N4X requirements

MATERIAL

- Barrels are 6061-T6 aluminum
- Caps are anodized 6061-T6 aluminum
- Buttons are nylon
- Mushroom head buttons are anodized 6061-T6 aluminum

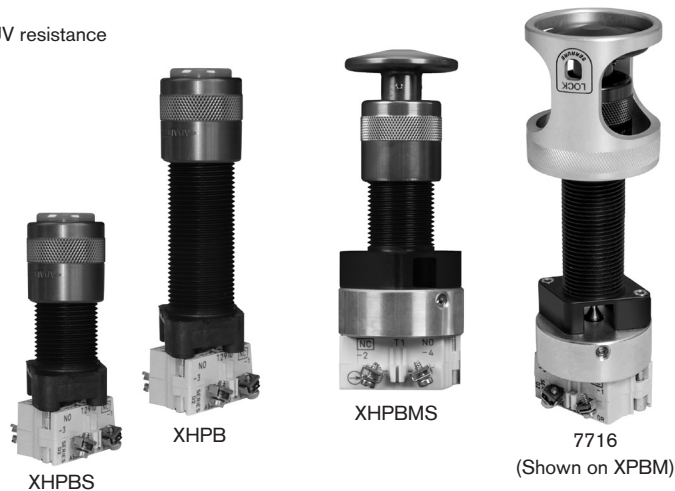

PUSHBUTTONS & ACCESSORIES

Catalog #	Description	Ship Weight (lbs.)
XHPB*	Long Barrel Momentary Pushbutton	½
XHPBS*	Short Barrel Momentary Pushbutton	½
XHPBPL*	Long Barrel Momentary Pushbutton w/Pad-lock Provision (holds button in depressed position)	½
XHPBSPL*	Short Barrel Momentary Pushbutton w/Pad-lock Provision (holds button in depressed position)	½
XHPBM	Long Barrel Red Momentary Mushroom Head Pushbutton	½
XHPBMS	Short Barrel Red Momentary Mushroom Head Pushbutton	½
XHPPM	Long Barrel Red Maintained Mushroom Head Pushbutton (includes 1NO/1NC contact block)	½
XHPPMS	Short Barrel Red Maintained Mushroom Head Pushbutton (includes 1NO/1NC contact block)	½
7716	Guard for Mushroom Head Pushbutton	¼
XBB	Silicone Rubber Protective Boot for XHPB/XHPBS - Black	¼
XBG	Silicone Rubber Protective Boot for XHPB/XHPBS - Green	¼
XBR	Silicone Rubber Protective Boot for XHPB/XHPBS - Red	¼
XHPL	Pad-Lock Cover for XHPB/XHPBS (holds button in depressed position)	¼
XHPLG	Pad-Lock Cover for XHPB/XHPBS (protects button from unauthorized actuation)	¼

*Standard pushbutton color is Black. Red and Green available - specify when ordering.

Certifications

Class I, Divisions 1 and 2, Groups B, C, and D

Class II, Divisions 1 and 2, Groups E, F, and G

Class III

NEMA Type 4, 7, and 9 / IP66

NEMA Type 4X (with stainless steel cover bolt option)

UL 1203/CSA C22.2 No. 25 & 30

UL 1203/CSA C22.2 No. 25 & 30

UL 1203/CSA C22.2 No. 25 & 30

UL50

